

Hirschmann Connector - HS

Features


- New design based on DIN43650 standard
- Meet European quality requirements
- Competitive price
- Appropriate built-in circuit selectable
- Anti-vibration design of screw thread



Specifications

Housing	Black: PA+30%GF
Contact holder, gland nut	PA+30%FV/PA+30%GF
Cable diameter	5-10mm
Contact material	Cu Zn
Max current	16A
Operating current	10A
Max wire cross-section	1.5mm ²
Insulation class	C-VDE 0110
Working temp.	-40~125°C
Protection level	IP67

Drawing

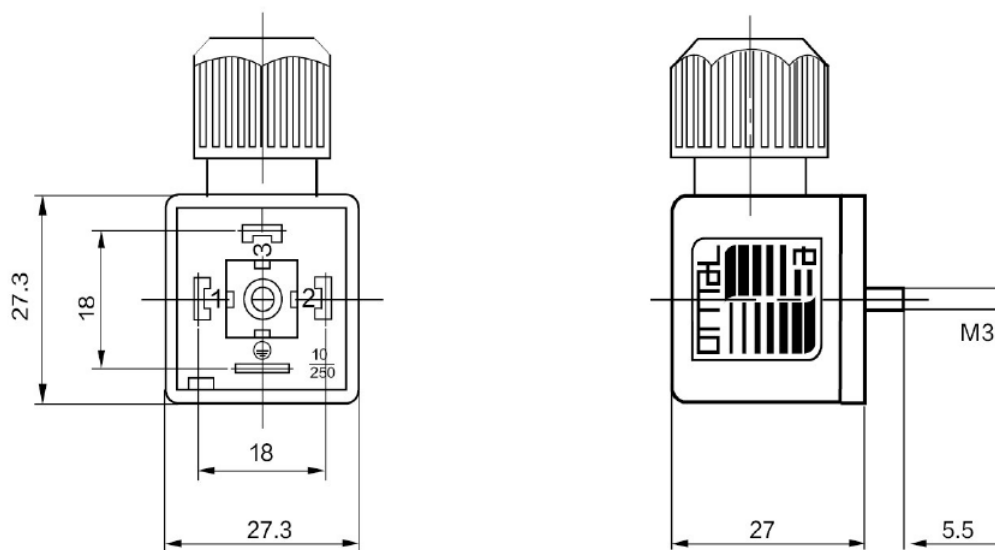



Wotian reserves the right to make any change in this publication without notice. The information provided is believed to be accurate and reliable as of this product sheet.

Contact us

Nanjing Wotian Technology Co.,Ltd.

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

Sales Manager: Wuzhou Lian

MP: 0086-13998828452

Email: lianwuzhou@wtsensorus.com

Anshan Wotian Sensor Corp. (Branch Factory)

Add: 262, Yueling Road, Gaoxin District, Anshan, China

American Company

Wotian Sensor Corporation

Sales Manager: Geoffery Gao

MP: 001- 626 808 1707

E-mail: geoffery@wtsensorus.com

German Company

Wotian Sensor GmbH

Sales Manager: Frances

E-mail: frances@wtsensorus.com

Korean Company

Korea Wotian Technology Co., Ltd.

Sales Manager: Yinji An

MP: 0086- 13478122009

E-mail: anyinji@wtsensorus.com