


PC-GS04-Connectors



Specification	
Material	304, 316L, Titanium alloy, Nickel alloy
Insulation resistance	$500V \geq 1000M\Omega$
Seal	$1 \times 10^{-10} \text{Pa} \cdot \text{m}^3/\text{s}$
Operating temperature	$-55^{\circ}\text{C} \sim 300^{\circ}\text{C}$
Withstand voltage	$\geq 2000V$
Lifetime	≥ 500 times
Pin plating	gold

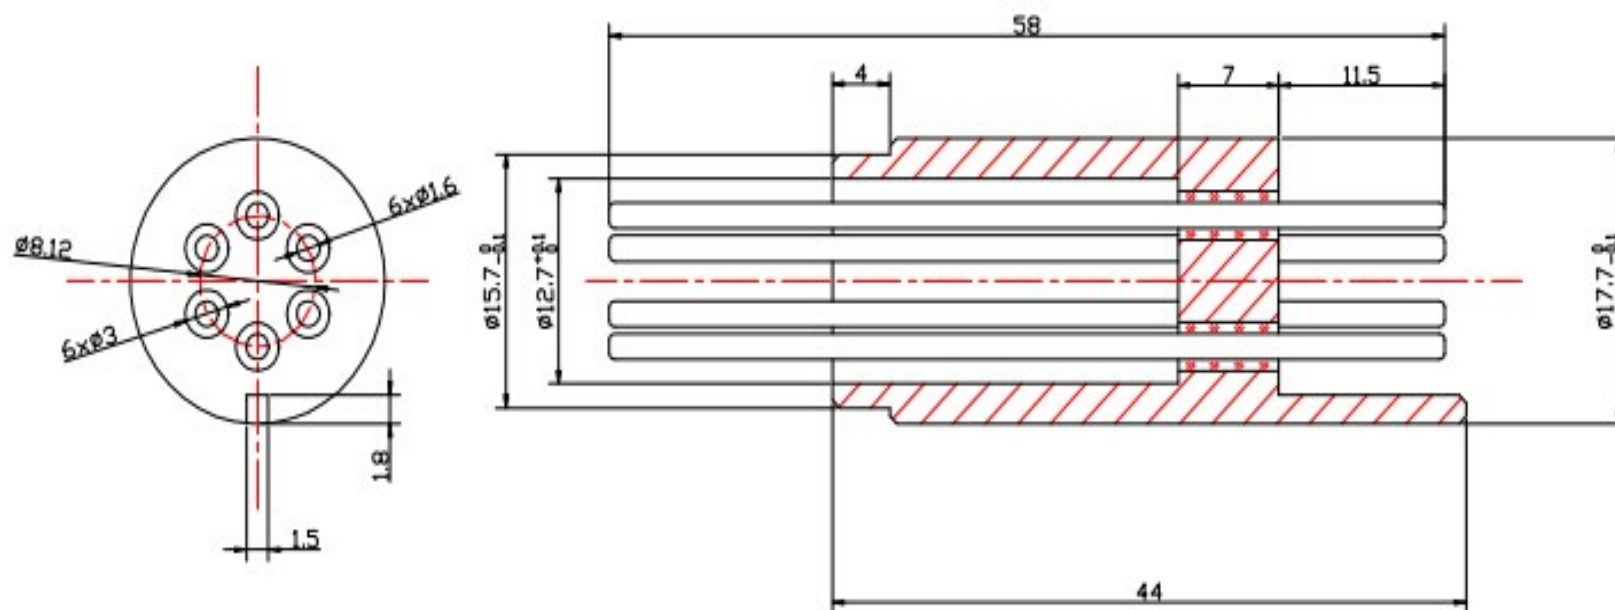

Contact us

Nanjing Wotian Technology Co.,Ltd.

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

Sales Manager: Wuzhou Lian

MP: 0086-13998828452

Email: lianwuzhou@wtsensorus.com

American Company

Wotian Sensor Corporation

Sales Manager: Geoffery Gao

MP: 001- 626 808 1707

E-mail: geoffery@wtsensorus.com

German Company

Wotian Sensor GmbH

Sales Manager: Frances

E-mail: frances@wtsensorus.com

Anshan Wotian Sensor Corp. (Branch Factory)

Add: 262, Yueling Road, Gaoxin District, Anshan, China

Sales Manager: Wuzhou Lian

MP: 0086-13998828452

Email: lianwuzhou@wtsensorus.com

Korean Company

Korea Wotian Technology Co., Ltd.

Sales Manager: Yinji An

MP: 0086- 13478122009

E-mail: anyinji@wtsensorus.com