



PC-GS07-Connectors

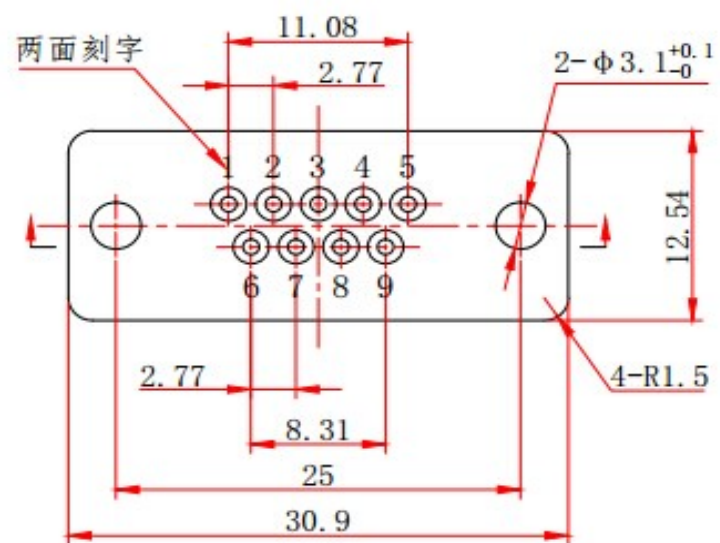

Specification	
Material	Cold rolled steel 4J50
Tolerance	GB/T1804-m
Insulation resistance	500V \geq 500M Ω
Seal	$\leq 1 \times 10^{-9}$ Pa.m ³ /s
Operating temperature	-55°C—125°C
Compression resistance	15MPa
Withstand volotage	1000V
Lifetime	\geq 500 times
Pin plating	Ni3 μ m+Au0.5 μ m

Drawing

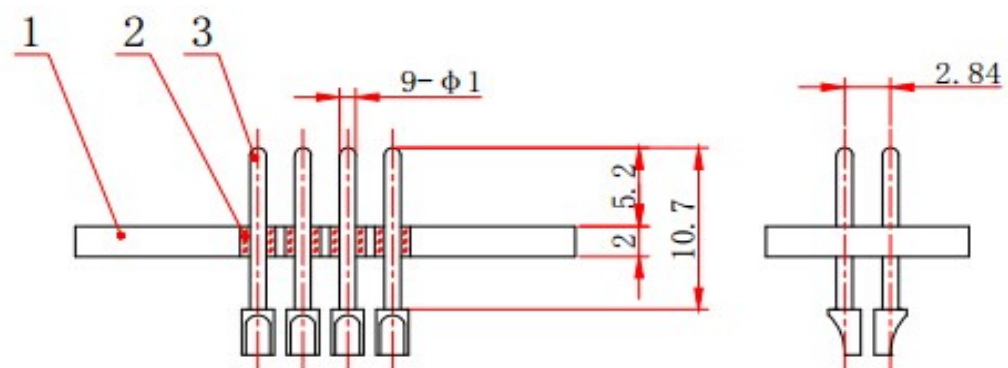

Contact us

Nanjing Wotian Technology Co.,Ltd.

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

Sales Manager: Wuzhou Lian

MP: 0086-13998828452

Email: lianwuzhou@wtsensorus.com

American Company

Wotian Sensor Corporation

Sales Manager: Geoffery Gao

MP: 001- 626 808 1707

E-mail: geoffery@wtsensorus.com

German Company

Wotian Sensor GmbH

Sales Manager: Frances

E-mail: frances@wtsensorus.com

Anshan Wotian Sensor Corp. (Branch Factory)

Add: 262, Yueling Road, Gaoxin District, Anshan, China

Sales Manager: Wuzhou Lian

MP: 0086-13998828452

Email: lianwuzhou@wtsensorus.com

Korean Company

Korea Wotian Technology Co., Ltd.

Sales Manager: Yinji An

MP: 0086- 13478122009

E-mail: anyinji@wtsensorus.com