


PC-GS09-Connectors



Specification	
Material	316L, 4J50
Tolerance	GB/T1804-m
Insulation resistance	250V \geq 100M Ω
Seal	$\leq 1 \times 10^{-9}$ Pa.m ³ /s
Operating temperature	-55 $^{\circ}$ C—125 $^{\circ}$ C
Withstand pressure	20MPa
Withstand voltage	1000V
Lifetime	\geq 500 times
Pin plating	Ni3 μ m+Au0.6 μ m

Drawing

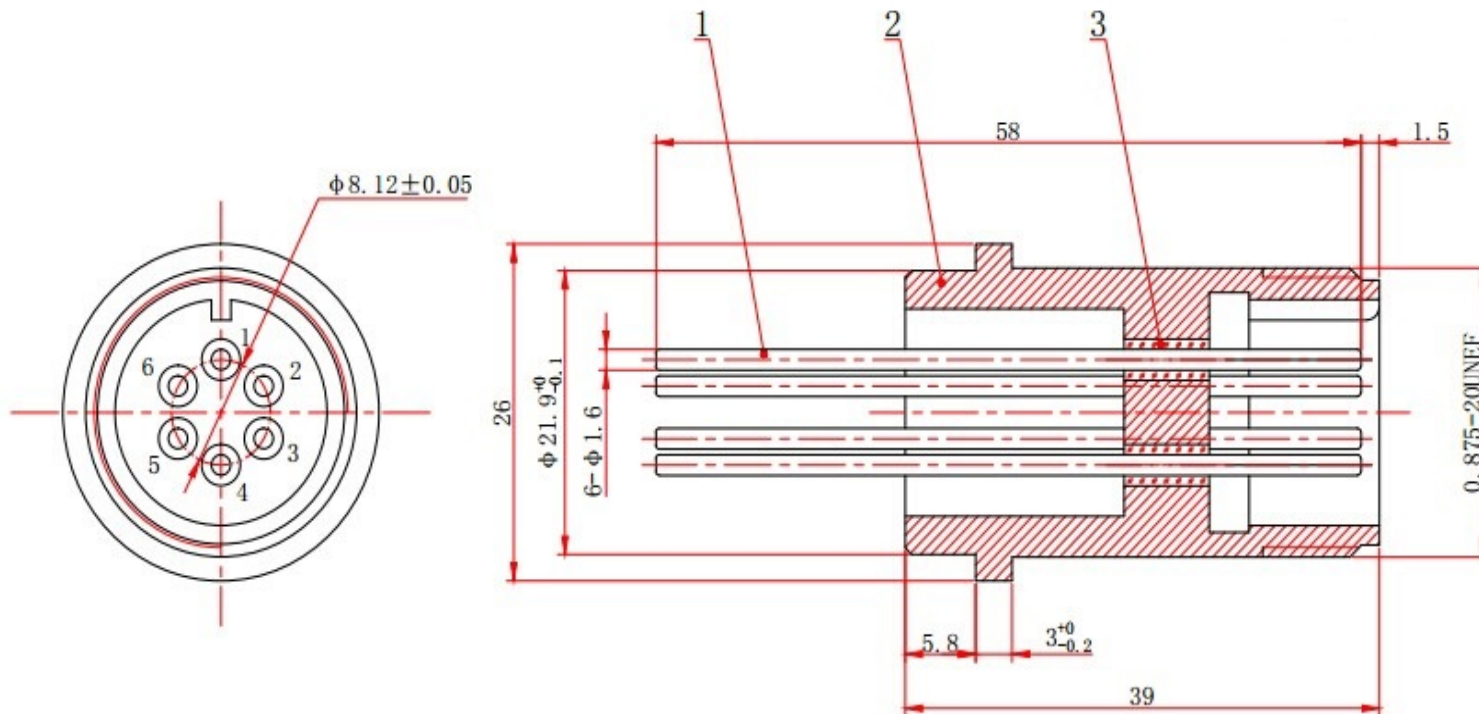

Contact us

Nanjing Wotian Technology Co.,Ltd.
Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China
Sales Manager: Wuzhou Lian
MP: 0086-13998828452
Email: lianwuzhou@wtsensorus.com

American Company
Wotian Sensor Corporation
Sales Manager: Geoffery Gao
MP: 001- 626 808 1707
E-mail: geoffery@wtsensorus.com

German Company
Wotian Sensor GmbH
Sales Manager: Frances
E-mail: frances@wtsensorus.com

Anshan Wotian Sensor Corp. (Branch Factory)
Add: 262, Yueling Road, Gaoxin District, Anshan, China
Sales Manager: Wuzhou Lian
MP: 0086-13998828452
Email: lianwuzhou@wtsensorus.com

Korean Company
Korea Wotian Technology Co., Ltd.
Sales Manager: Yinji An
MP: 0086- 13478122009
E-mail: anyinji@wtsensorus.com