

# PCU02 Ultrasonic level transmitter

## Features

- Non-contact
- Not effected by material property, such as pressure environments, viscosity and specific gravity
- Integrated keypad with security code
- Easy installation and low operating costs
- Can be used in a versatile of application
- Maintenance-free.
- Easy to set program no need to train personal
- Fully isolated analog 4-20ma output
- Better accuracy and stability in difficult conditions
- Internal temperature compensation improves accuracy

## Applications

- Level measurement
- Distance measurement
- Volume measurement
- Pump control

### Notes:

- 1 Do not touch the diaphragm with hard objects, which may cause damage to the diaphragm.
- 2 Please read the Instruction Manual of the product carefully before installation and check the relevant information of the product.
- 3 Strictly follow the wiring method for wiring; otherwise it may cause product damage or other potential faults.



## Product overview

The ultrasonic level transmitter is a low-cost, non-contact and easy-to-install measurement device. It is able to meet the every-day needs of commercial production, as well serving a more specialized role in the technologically advanced aerospace industry, thus placing it firmly in the category of high-level measurement technology. Unlike other level indicators with limited uses, the easy-to-install ultrasonic level indicator is a highly accurate device with enough specialized uses to ensure that the needs of the customer are met.

### Notes:

- 1 Do not misuse documentation.
- 2 The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- 3 Complete installation, operation, and maintenance information is provided in the instructions of the product.
- 4 Misuse of the product may cause danger or personal injury.


### Performance parameters

Measure Range:	5m,10m (Optional)
Blind zone:	≤0.35m
Beam angle	8° (range 5m),10° (range 10m) 0.5%F.S
Accuracy:	OLED
Display:	1mm or 0.1%FS
Display resolution:	14~28VDC
Power:	5W
Power consumption:	5m,10m (Optional)
Output (optional):	4~20mA RL>500Ω (standard) RS485 2 relays (AC: 3A 250V )
Working temperature	-20~60°C
Storage temperature	-20~70°C
Relative humidity	(10~85)% (no condensation)
Temperature compensation	Automatic
Installation:	Thread / Flange
Ingress Protection:	IP65
Measure type	Level / Distance

### Principle

The principle of operation of the ultrasonic sensor system is to use the ultrasonic pulses which are transmitted by the transducer to the surface to be monitored and are reflected back to the transducer, the time period between transmission and reception of the sound pulses is directly proportional to the distance between the transducer and surface

The latest microcomputer technology and the proven processing software select the level echo from among any number of false echoes and calculate the exact distance to the product surface.

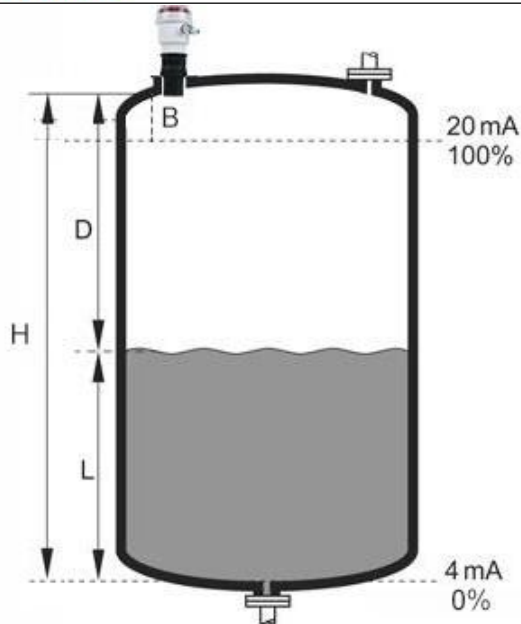

B = Blanking distance

D = Distance from transducer to material surface

L = Height in silo

The distance D is determined from the velocity of sound and the time period t by the formula:




$$D = V \cdot T / 2$$

Example:

With the velocity of sound = 334.1 M/s, a time period of 60m/s corresponds to a transmission path of 20.046M and thus to a distance of 10.023M.

An integrated temperature sensor detects the temperature in the vessel and compensates the influence of temperature on the signal running time.

### Display

Level :	Current :	Temperature:
		

## Application


Sewage/waste water/tapwater treatment equipment. Such as silos, open tanks, dams and wells.

Liquids such as edible-oils, sauces and beverages.


Chemical material such as solvent, paints, carbonic acid, water lime slurry and wax.

Granular materials such as flour, wheat and corn.


Chemical fibers, petrochemical materials such as plastic powders, plastic granules and plastic chips.

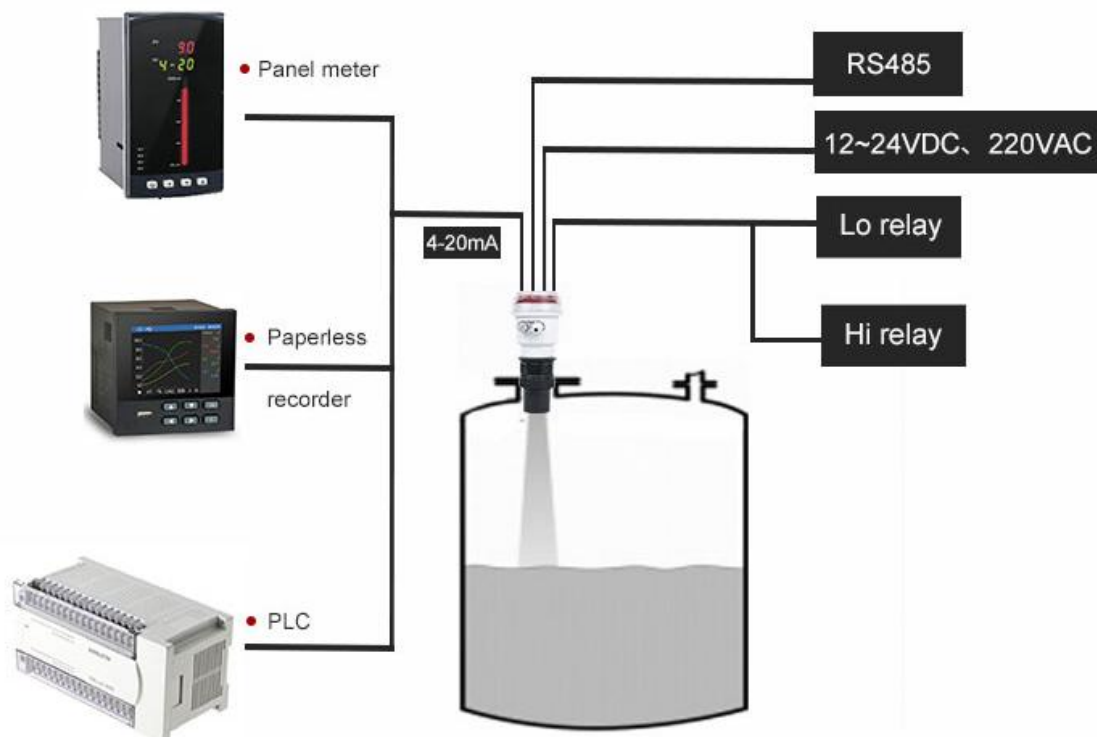


Liquid / Powder measurement




Measuring in agitator tank

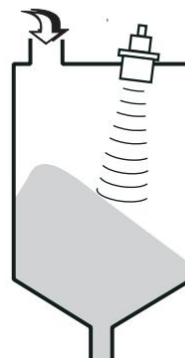


Keep transducer perpendicular to liquid.

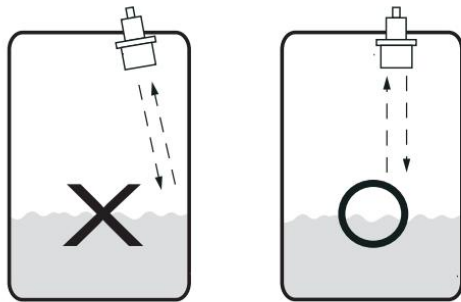


The transducer should not be mounted too close to the tank wall, the build-up on the tank wall cause false echoes.

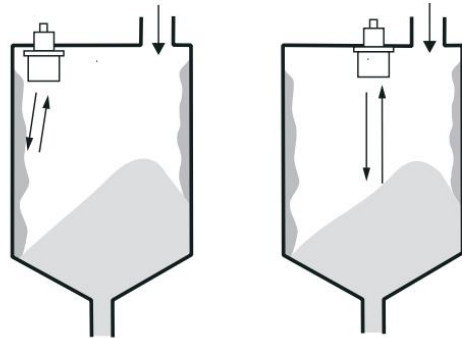


Mount the transducer away from the inlet to avoid false echoes.

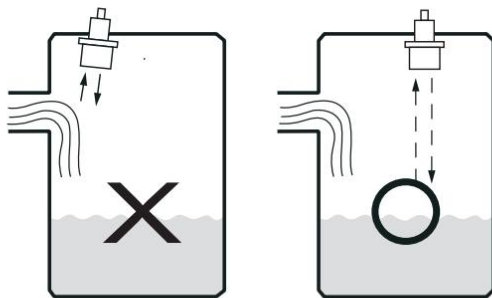


When you mount the transducer on the solid tank, the transducer must point to the tank outlet.

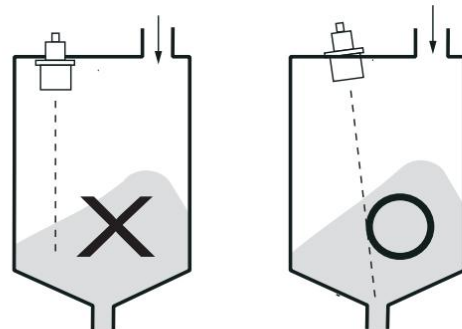


The transducer should not be mounted too close to the tank wall, the bracket can cause strong false echoes.

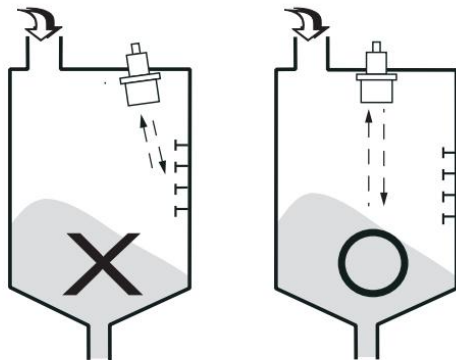

As is illustrated by the figure on the right, the transducer should be mounted on the top of guide tube to prevent the false echoes from turbulence and foam. The guide tube should come with a vent hole at top of the tube to allow the liquid vapor go out of the tube.

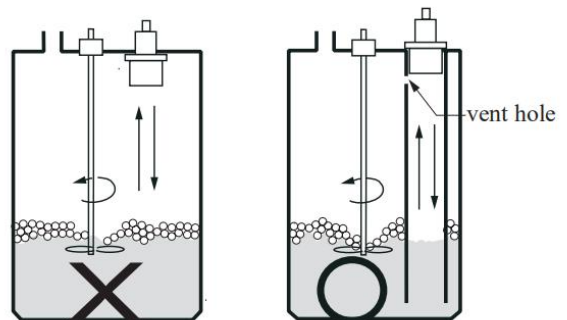

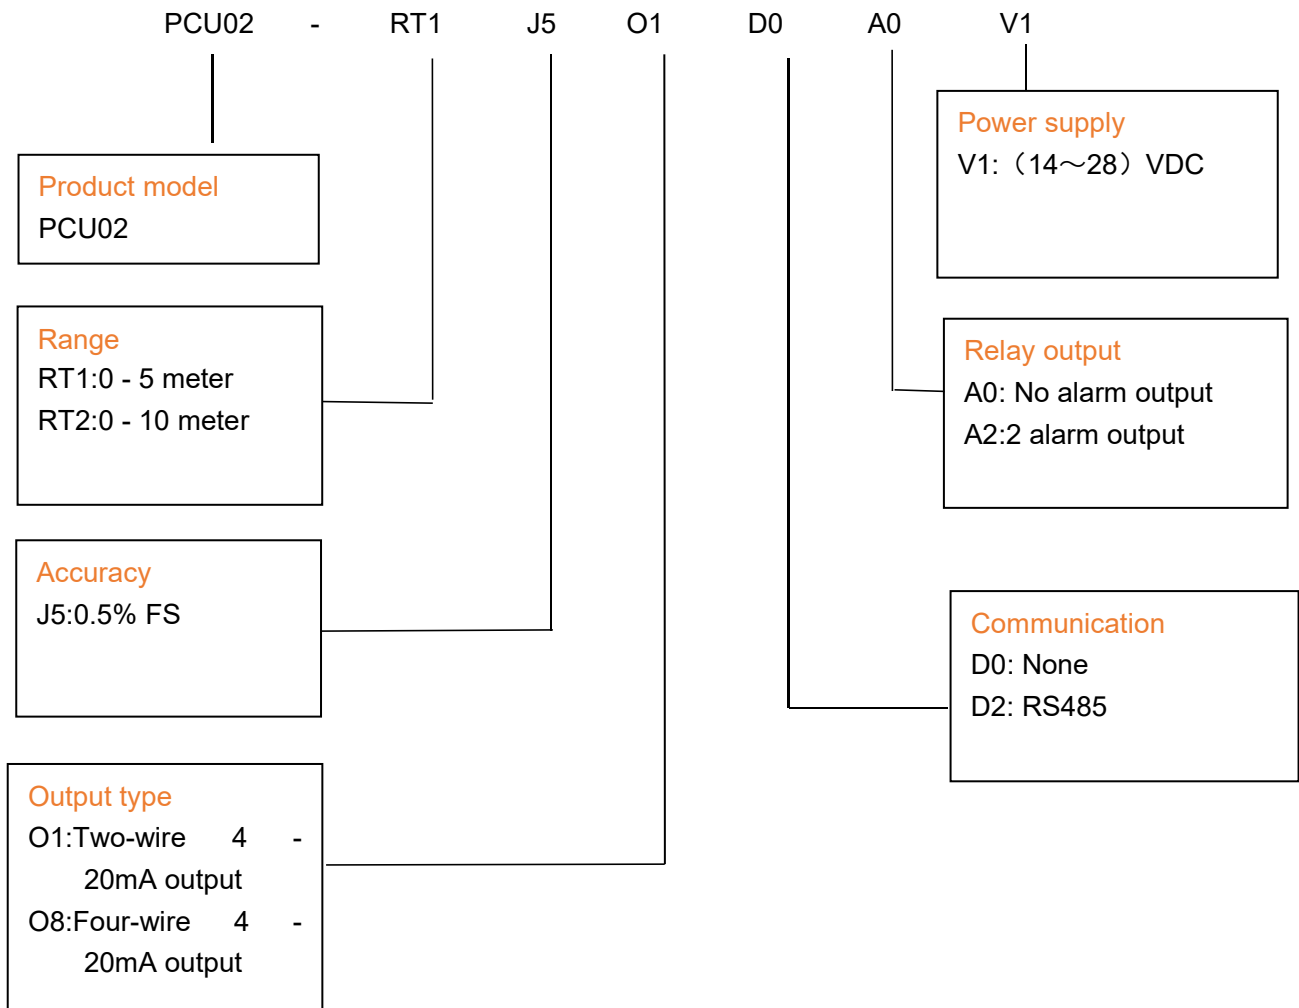

**Example:** PCU02 RT1 J5 O1 D0 A0 V1

Product model: PCU02. RT1:Range 0 - 5 meter. J5:Accuracy 0.5% FS. O1:Two-wire 4 - 20mA output. D0: No Communication. A0:No alarm output. V1:Power supply (14~28)VDC.

Wotian reserves the right to make any change in this publication without notice. The information provided is believed to be accurate and reliable as of this product sheet.

### Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: [www.wtsensor.com](http://www.wtsensor.com)

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail: [dr@wtsensor.com](mailto:dr@wtsensor.com)