

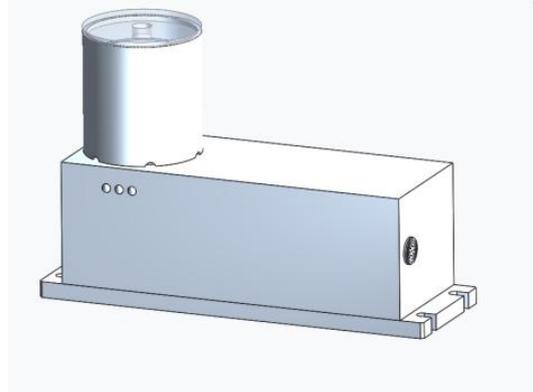



Load Cell PCWL-GT

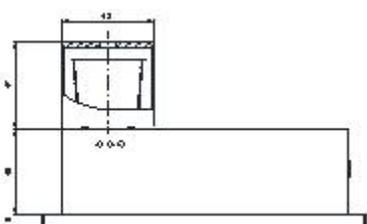

Parameter performance	Unit	Specification
Capacity	g	50
Division value	mg	0.1
Non-linearity	mg	0.5
Repeatability	mg	0.3
Minimum capacity	mg	2
Temperature drift	ppm/10°C	5
Power supply	V~DC	9-36
Interface		RS232, RS485
Response time	s	2.5
Rated Temperature	°C	10~+30
Operating humidity	%	20~80
Safe load limit	% of Emax	500
Protection class		IP54
Material Housing and base loading plate		Stainless steel , aluminum alloy

Mounting dimension		
		

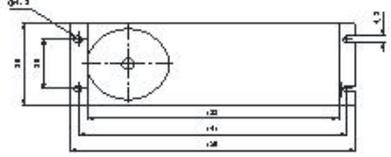

Wotian reserves the right to make any change in this publication without notice. The information provided is believed to be accurate and reliable as of this product sheet.

Contact us

Nanjing Wotian Technology Co.,Ltd.

website: www.wtsensor.com

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail: dr@wtsensor.com