



PCWL T-200

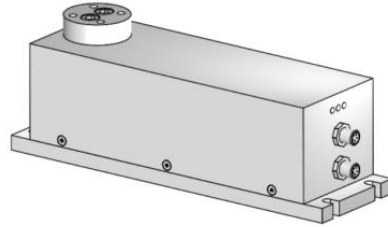

Parameter performance	Unit	Specification	
Capacity	kg	3	5
Division value	mg	10	
Non-linearity	mg	30	50
Repeatability	mg	30	50
Minimum capacity	mg	50	50
Temperature effective on sensitivity	% of capacity	0.025	
Operating voltage	V~DC	9-36	
Interface		RS485	
Stabilization time	s	≤1	≤1.2
Rated temperature range	°C	10~+30	
Operating humidity range	%	20~80	
Safe load limit	% of Emax	500	
Protection class		IP54	
Material Housing, base plate Loading plate		Stainless steel , aluminum alloy	

Mounting dimension

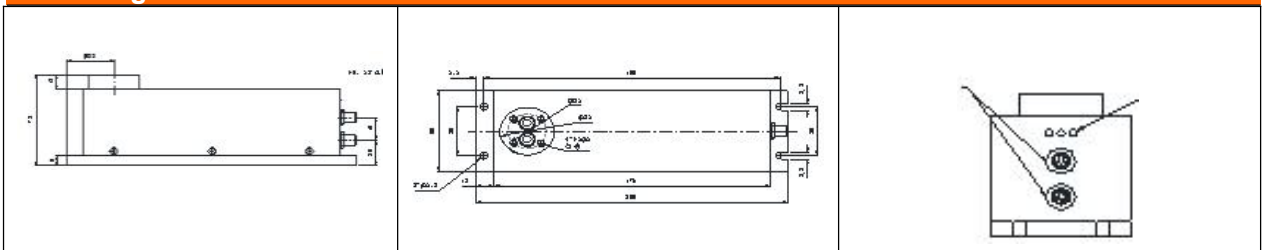



Wotian reserves the right to make any change in this publication without notice. The information provided is believed to be accurate and reliable as of this product sheet.

Contact us

Nanjing Wotian Technology Co.,Ltd.

website: www.wtsensor.com

Add: 5 Wenyong Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail: dr@wtsensor.com