

# PCM260H Level Transmitter

## Features

- Diffusion silicon piezoresistive sensor
- Immersion probe measurement, simple and convenient installation
- For level measurement
- High accuracy, all stainless steel structure
- Small size and light weight
- Strong anti-interference, good long-term stability
- Anti-vibration, shock resistance

## Applications and industries

- Water level measurement in rivers and lakes
- Level measurement of containers and storage systems
- Sewage lift pump and pumping station control
- Sewage, sediment, and flood drainage system monitoring

### Notes:

- 1 Do not touch the diaphragm with hard objects, which may cause damage to the diaphragm.
- 2 Please read the Instruction Manual of the product carefully before installation and check the relevant information of the product.
- 3 Strictly follow the wiring method for wiring; otherwise, it may cause product damage or other potential faults.
- 4 Misuse of the product may cause danger or personal injury.



## Product overview

The PCM260H Level Transmitter adopts the high-performance diffusion silicon piezoresistive pressure sensor as the measuring element, and accurately measures static pressure of the liquid proportional to the level depth; the result is converted to the standard current signal through the signal conditioning circuit, establishing the linear corresponding relation between the output signal and liquid depth to realize the measurement for the liquid depth. PCM260H has advantages of high precision and small volume. By submerging it directly into liquid, the height from the end of the transmitter to the liquid surface can be measured easily. The product is applicable to the level measurement and control in the petroleum, chemical, power plant, urban water supply, and hydrological exploration fields.

This product, with stable and reliable performance, has passed long-term aging and stability screening, and can be used in harsh outdoor environments.

### Notes:

- 1 Do not misuse documentation.
- 2 The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- 3 Complete installation, operation, and maintenance information is provided in the instructions of the product.
- 4 Misuse of the product may cause danger or personal injury.

Performance parameters	
Pressure range	0~1mH <sub>2</sub> O...20mH <sub>2</sub> O
Pressure reference	Gauge pressure
Accuracy	±0.5%FS (@25°C)
Power supply	12~30V
Output signal	4~20mA
Temperature drift	35kPa: ±3%FS (@0~40°C) Other ranges: ±1.5%FS (@-10~70°C)
Power-on response time	≤100ms (Up to 90%FS)
Overload pressure	(Refer to "Pressure range selection" on page 3)
Durability	≥10 <sup>6</sup> pressure cycles
Operating temp.	-10°C~70°C
Medium temp.	-10°C~70°C
Storage temp.	-40°C~70°C
EMC	EN61000-6-2, EN61000-4-3
Insulation resistance	≥100MΩ/250VDC
Vibration resistance	Sine curve: 20g, 25Hz~2kHz; IEC 60068-2-6 Random: 7.5g, 5Hz~1kHz; IEC 60068-2-64
Shock resistance	Shock: 200g/1ms; IEC 60068-2-27 Free fall: 1m; IEC 60068-2-32
Protection grade	IP68
Surge	300V
Static electricity	IEC 61000-4-2 Grade 3
Medium compatibility	All kinds of media compatible with stainless steel 304 (Protective cap material: PC+ABS)


### Electrical connection and wiring method

Code	J1: 2088 housing	J2: 2088 with display	J3: Cable outlet
Dimension In mm			
Wiring method			<p>Red: Vcc Blue/Yellow: Iout</p>

### Pressure range selection

Sensor pressure range	Pressure range	Pressure range code	Overload pressure	Burst pressure	Note
35kPa	1mH <sub>2</sub> O < X ≤ 4mH <sub>2</sub> O	35kG	300%FS	600%FS	
100kPa	4mH <sub>2</sub> O < X ≤ 10mH <sub>2</sub> O	100kG	200%FS	500%FS	
250kPa	10mH <sub>2</sub> O < X ≤ 20mH <sub>2</sub> O	250kG	200%FS	500%FS	

Note: G, gauge pressure; X, pressure range needed

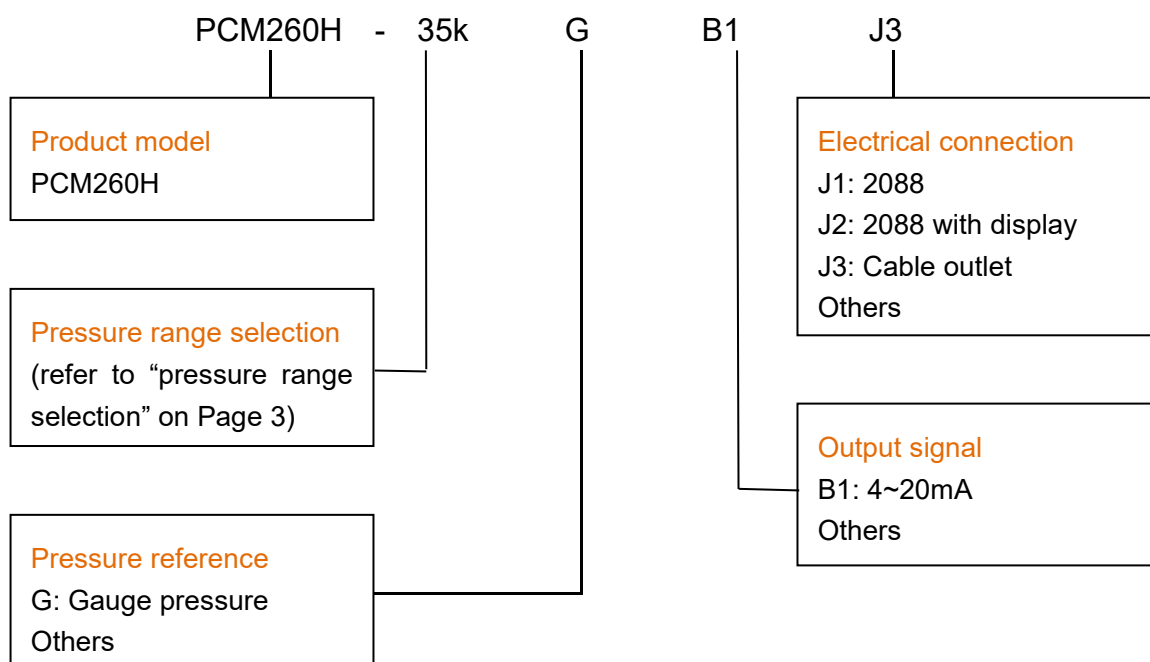

**Example:** PCM260H-35kGB1J3


Product model: PCM260H. 35k: pressure range 0~35kPa, G: gauge pressure. B1: output signal 4~20mA. J3: electrical connection: cable outlet.

**Ordering tips**


- 1 Ensure the measured medium is compatible with the contacting part of the product when placing an order. The default material of the product is 304 (the protective cap material of the level probe: PC+ABS).
- 2 Cable length is not mentioned in the datasheet and should be confirmed based on the details provided in the task order. The available cable materials are PUR and PVC, with a diameter of  $7.2 \pm 0.2$ mm. Cables with special specifications can be customized.
- 3 The sensor diaphragm should not be touched by foreign material. It is recommended to install a protective board inside the pressure port.
- 4 The default cable length of the product is 2 meters. If a longer cable is needed, there will be an extra charge.
- 5 **If the product needs to be used in fields with frequent lightning, please choose the lightning protection level transmitter.**
- 6 The air vent should be open to the atmosphere, and there should be no water. Please make sure the outlet end is waterproof and moistureproof when using the product.
- 7 Customization is available for pressure ranges >20m.

## Notes


The air duct of the liquid level transmitter needs to remain open to the atmosphere. During operation, ensure that the duct is not blocked or bent. Additionally, proper waterproof and dustproof measures should be applied to the air duct; otherwise, it may impair transmitter performance and cause damage to the device.

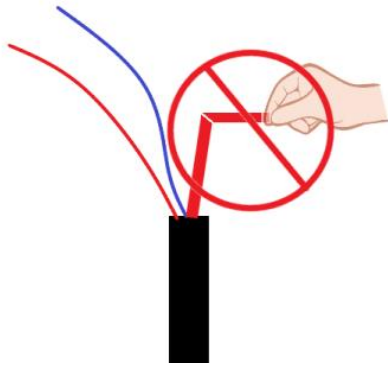

Do Not Bend

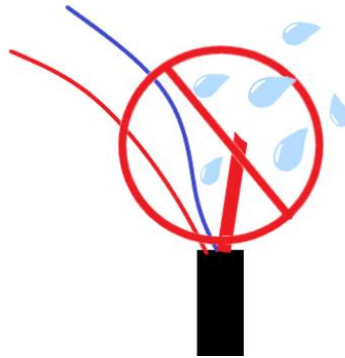

Do Not Expose to Rain or Water

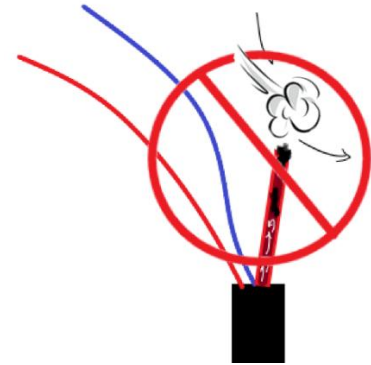

No Dust Blockage

Wotian reserves the right to make any change in this publication without notice. The information provided is believed to be accurate and reliable as of this product sheet.

## Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: [www.wtsensor.com](http://www.wtsensor.com)

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

E-Mail: [dr@wtsensor.com](mailto:dr@wtsensor.com)