Large Hirschmann Connector（100040301005）

Features

- New design based on DIN43650 standard
- Meet European quality requirements
- Competitive price
- Appropriate built-in circuit selectable
- Anti-vibration design of screw thread






Application

- Industrial pressure transmitter

Performance parameters	
Digits	3+PE
Cable diameter	4~8 mm
Voltage	250V AC / 300V DC
Current	10A (16A max)
Spacing	18mm
Temp. range	-40℃~+125℃
IP grade	IP67
Housing material	PA66+30% FV
Pin material	Zinc-plated copper
Insulation types	C-VDE 0110

Structure and dimension

Dimension
In mm

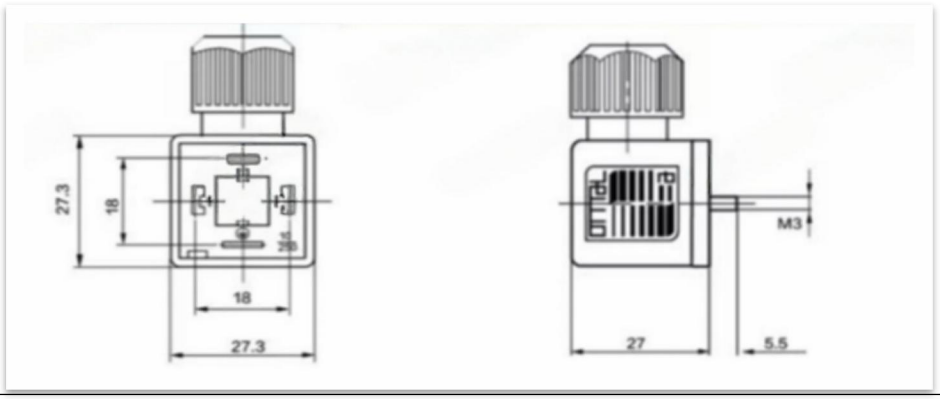

Large Hirschmann Base (100040301002)

Features

- New design based on DIN43650 standard
- Meet European quality requirements
- Competitive price
- Appropriate built-in circuit selectable
- Anti-vibration design of screw thread

Application


- Industrial pressure transmitter



Performance parameters	
Circular shape	ARB03S(16-sided shape)
Digits	3+PE
Circular thread	M27x1.5
Voltage	250V AC / 300V DC
Current	10A (16A max)
Spacing	18mm
Temp. range	-40℃~+125℃
IP grade	IP65
Housing material	PA66+30% FV
Pin material	Zinc-plated copper
Insulation type	C-VDE 0110

Structure and dimension

Dimension
In mm

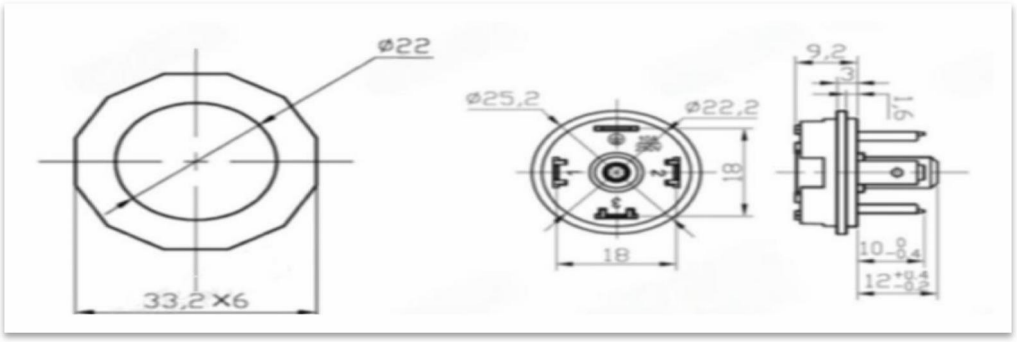

Wotian reserves the right to make any change in this publication without notice. The information

provided is believed to be accurate and reliable as of this product sheet.

Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: www.wtsensor.com

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail：dr@wtsensor.com