Mini Hirschmann Connector（100040300031）

Features

- New design based on DIN43650 standard
- Meet European quality requirements
- Competitive price
- Appropriate built-in circuit select-able
- Anti-vibration design of screw thread






Applications

- Industrial pressure transmitter

Performance parameters	
Digits	3+PE
Cable clamping range	4.5~6.5 mm
Voltage	250V AC / 300V DC
Current	10A (16A max)
Spacing	9.4mm
Temp. range	-40℃~+125℃
IP grade	IP65
Housing material	PA66+30% FV
Pin material	Zinc-plated copper
Insulation types	C-VDE 0110

Structure and dimension

Dimension
In mm

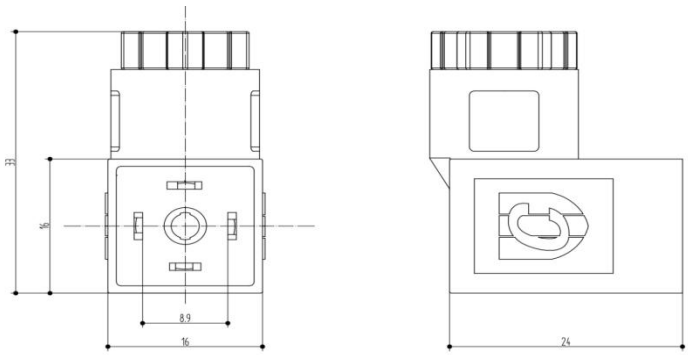

Mini Hirschmann Base (100040300030)

Features

- New design based on DIN43650 standard
- Meet European quality requirements
- Competitive price
- Appropriate built-in circuit select-able
- Anti-vibration design of screw thread




Applications

- Industrial pressure transmitter

Performance parameters	
Digits	3+PE
Fixing screw	M3
Voltage	250V AC / 300V DC
Current	10A (16A max)
Spacing	9.4mm
Temp. range	-40℃~+125℃
IP grade	IP65
Housing material	PA66+30% FV
Pin material	Zinc-plated copper
Insulation type	C-VDE 0110

Structure and dimension

Dimension
In mm

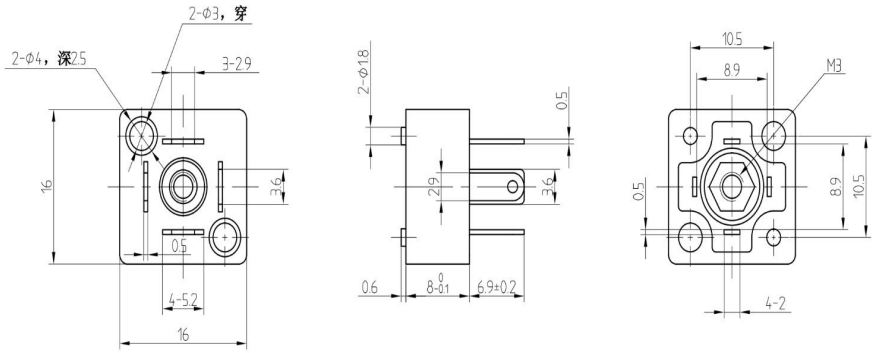

Wotian reserves the right to make any change in this publication without notice. The information

provided is believed to be accurate and reliable as of this product sheet.

Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: www.wtsensor.com

Add: 5 Wenying Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail：dr@wtsensor.com